

LOLER Safety



The Lifting Operations and Lifting Equipment Regulations 1998 (LOLER) covers any equipment used at work for lifting or lowering loads, including anchoring or supporting attachment.

These regulations stipulate that the equipment is marked with the appropriate information for its safe use, such as safe working loads.

Daily and weekly checks should be made, in addition to a thorough recorded examination every 6 to 12 months. If the equipment is installed, the location must also be examined at the following points:

- after installation but before first use
- after assembly but before first use on a site or in a new location

Should the equipment be hired it should be accompanied by a physical copy of the last examination report.

The AssetTag holder should be permanently fixed to the equipment in a suitable safe place. Perform a thorough inspection of the equipment and complete the insert. In the result of a inspection failure remove insert and inform a supervisor.



Inserts are designed for use with the AssetTag holder, see page 163 for further details. The AssetTag holder clearly states 'Do not use this equipment' when the tag is removed.

Tag size: 50mm x 181mm
Material: Polypropylene



LOLER Safety	
Description & Contents	Code
Single insert	TG10-1
Pack of 10 inserts	TG1010
Pack of 50 inserts	TG1050
BOX - 10 holders, 10 inserts, 1 pen	TG10BOX

MEWP Safety

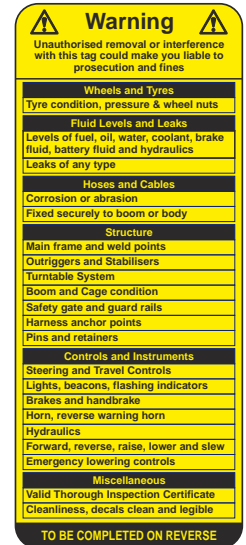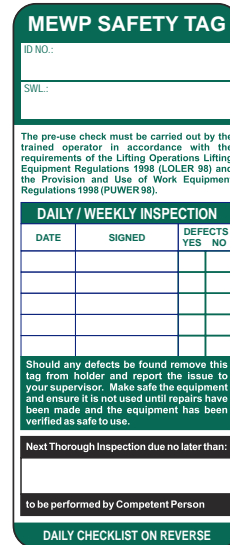

The Work at Height Regulations came into force in 2005. These regulations apply to work at height where there is a risk of fall liable to cause personal injury. It states that 'equipment for work at height is properly inspected and maintained'. MEWPs (Mobile Elevating Work Platforms), scissor lifts, booms and cherry pickers are included under this instruction.

A daily pre-work inspection should be carried out and recorded on these tags.

The AssetTag MAX holder should be permanently fixed to the equipment in a suitable safe place. Perform an inspection (a checklist is printed on the reverse) and record the result on the tag. In the event of the equipment failing the inspection, remove insert and inform a supervisor.

Inserts are designed for use with the AssetTag MAX holder, see page 163 for further details. The AssetTag MAX holder clearly states 'Do not use this equipment' when the tag is removed.

Tag size: 75mm x 180mm
Material: Polypropylene



MEWP Safety	
Description & Contents	Code
Single insert	TG11-1
Pack of 10 inserts	TG1110
Pack of 50 inserts	TG1150
BOX - 10 holders, 20 inserts, 2 pens	TG11BOX