

# Hasps : Lockout Tagout

## Di-Electric Lockout Hasp


Manufactured from reinforced nylon, these hasps are tough, flexible and have the added benefit of being completely non-conductive. Accepts padlocks with a shackle diameter up to 9mm.

Available in 3 different size options;

LOK053 - 3 holes, 3mm thread thickness, 45mm clearance

LOK054 - 6 holes, 6mm thread thickness, 80mm clearance

LOK055 - 6 holes, 6mm thread thickness, 80mm clearance

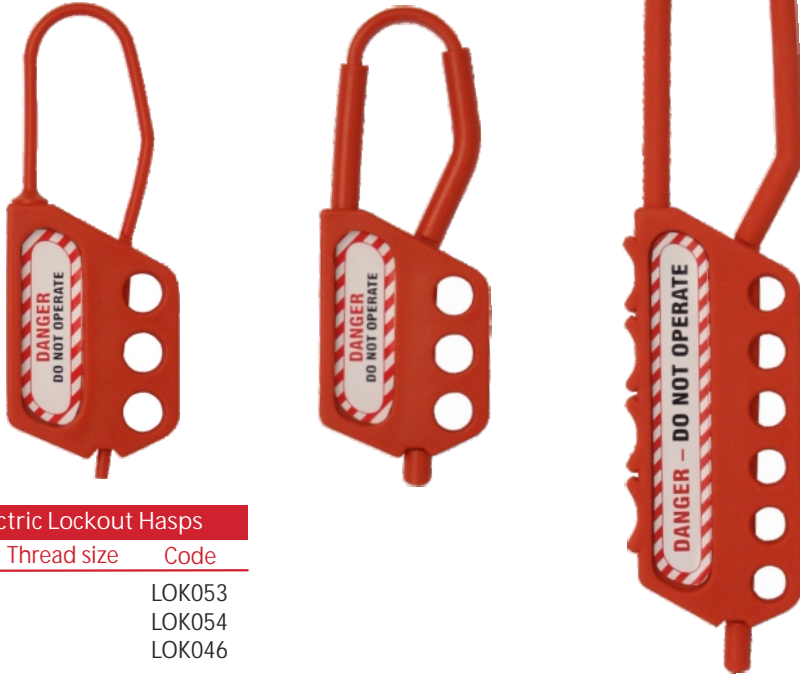

We recommend the use of LOK053 with the universal MCB lockout device.

### Di-electric Lockout Hasps

# Holes / Thread size	Code
3 / 3mm	LOK053
3 / 6mm	LOK054
6 / 6mm	LOK046

## Di-Electric Lockout Hasp

Nonconductive reinforced nylon hasp which opens using a pull and spring method.

This shackle can be locked by up to 6 padlocks, the thickness of the bracket is 6 mm.



### Di-electric Lockout Hasp

Code
LOK127

## Premier Di-electric Hasp

Our premier di-electric lockout hasp utilises a unique swing lock system to securely fasten the thread.

Available in 3mm and 6mm thread sizes, each has an integral 4 holes for multiple padlock use.



### Di-electric Lockout Hasps

# Holes / Thread size	Code
4 / 3mm	LOK119
4 / 6mm	LOK120